
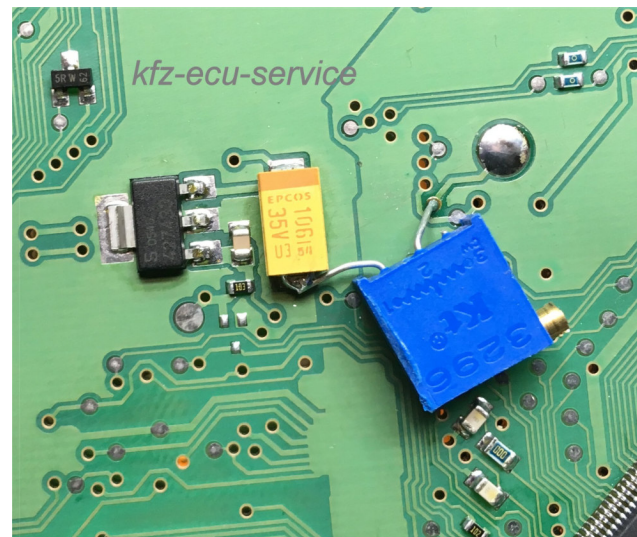
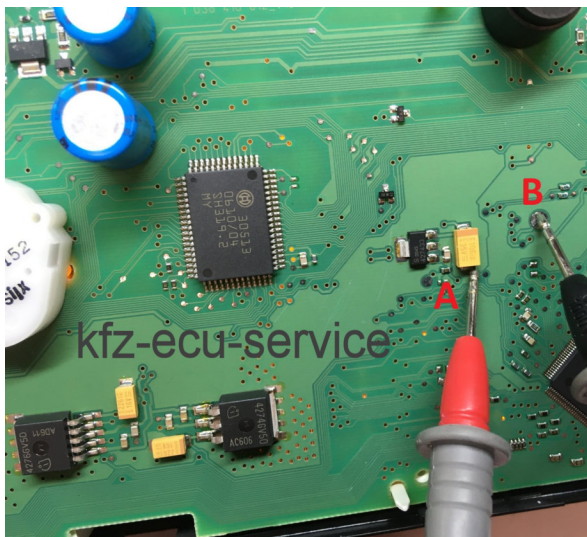


Installation Info for LCD Display Mercedes A-Klasse W169 & B-Klasse W245

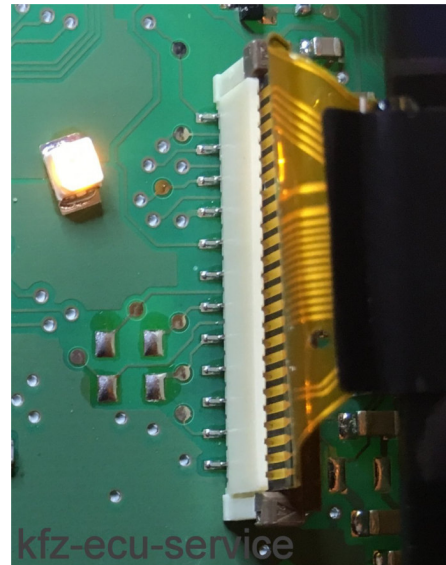

1. Disassemble the speedometer
2. Remove the defective display, the display is only put.
3. Remove the white plastic foils between the display and clean it
4. Put the display like in the picture in the display connector with TOP side upwards.
5. For better contrast with 8 volts of version an opposition of **1k** potentiometer built-in has to go
6. For check the dashboard $U = 12\text{Volt} / 18$ Connector: Positive = Pin 5 + Pin 6 / Negative = Pin 1
7. Check the Voltage pointer **A** and **B**
8. Check the Voltage $A:B = 6,20 - 7,10$ Volt no install of resistor / potentiometer necessary!
9. Check the Voltage $A:B > 6,20 - 7,10$ Volt install the **1K Ohm** potentiometer!
10. Use the potentiometer to set the voltage between point A: B to 6.50 volts!

Mobil: +49 179 73 888 39
Mobiler Kfz-Elektronik Service

www.kfz-ecu-service.de

Version 1.1